



T1210H-6E 12A TRIAC

Rev.A.1.1

DE 

The T1210H-6E triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Compared to traditional triacs, T1210H-6E provides a very high switching capability up to junction temperatures of 150°C. It can be driven directly through the MCU I/O port. Package TO-263 is RoHS compliant.

Peak gate power	P_{GM}	10	W
Peak pulse voltage ($T_j=25$; non-repetitive,off-state;FIG.8)	V_{pp}	4	kV

E **E** **CHARACTERISTICS** (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I _{GT}	V _D =12V R _L =33	- -	MAX.	10	mA
V _{GT}		- -	MAX.	1	V
V _{GD}	V _D =V _{DRM} T _j =150 R _L =3.3k	- 1MAX.		W	

FIG.1: Maximum power dissipation vs. ambient temperature (Tc = 0.004 Td [(68)13.(ax)12.4 (i)7.1 .44 (66)]TJ 013

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

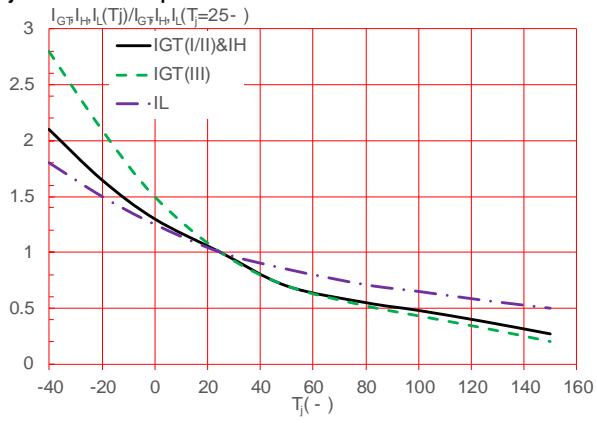


FIG.8 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards



DE



Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		H- I- J			
T1210H-6E	600	10	TO-263	50	Tube
T1210H-6E-TR				800	Tape & Reel

Document Revision History

Date	Revision	Changes
Apr.11, 2023	A.1.0	Last updated

