



## T1610H-6A 16A TRIAC

Rev.A.1.1


### DESCRIPTION:

The T1610H-6A triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Compared to traditional triacs, T1610H-6A provides a very high switching capability up to junction temperatures of 150°C. It can be driven directly through the MCU I/O port. By using an internal ceramic pad, T1610H-6A provides a rated insulation voltage of 2500 VRMS, complying with UL standard.


Peak gate current ( $t_p=20 \text{ s}$ ,  $T_j=150 \text{ }$ )

mA 303>13.6 ( 0835re W n q /36 Tw 0q /309

ORDERING INFORMATION

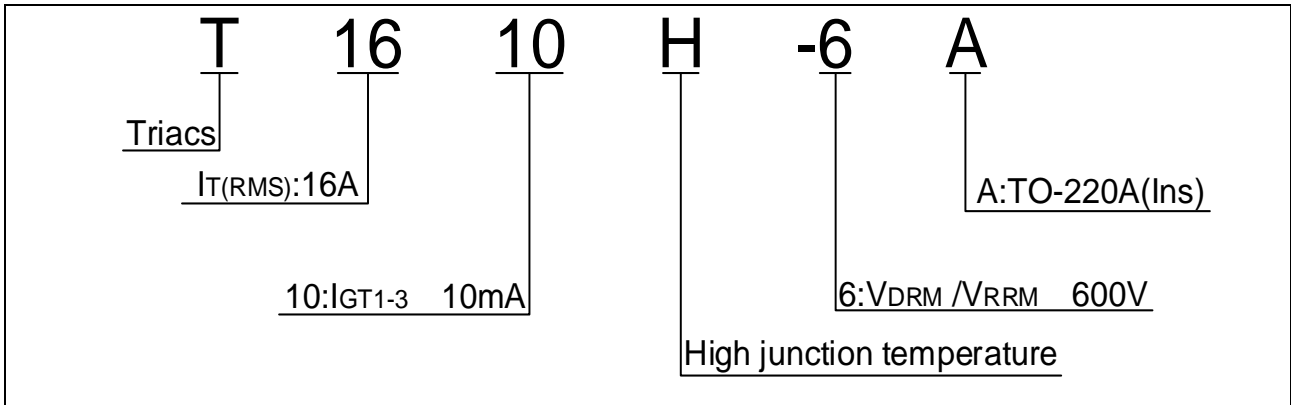

MARKING

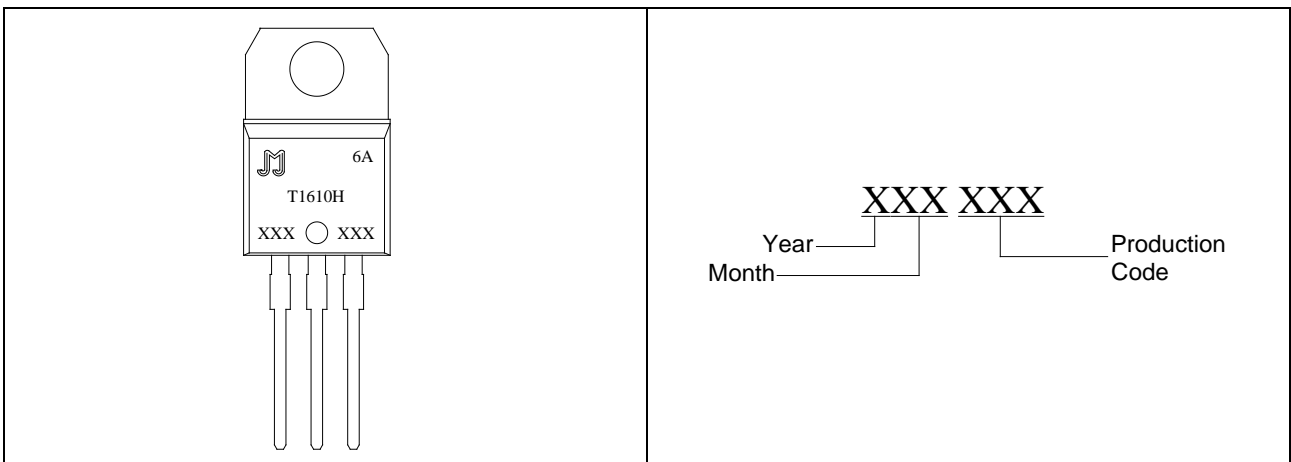

**FIG.1:** Maximum power dissipation versus RMS on-state current

---

---

**FIG.2:** RMS on-state current versus case temperature



## ORDERING INFORMATION

Order code	Voltage $V_{DRM}/V_{RRM}$ (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		H I- J			
T1610H-6A	600	10	TO-220A(Ins)	50	Tube

## Document Revision History

Date	Revision	Changes
Apr.10, 2023	A.1.0	Last updated
Oct.11, 2025	A.1.1	Revise PACKAGE MECHANICAL DATA

**PACKAGE MECHANICAL DATA**

