



JST139A-800F 16A TRIAC

Rev.A.1.1

DESCRIPTION:

Tb 5 A 0 1000

0.0000

0.0000

0.00

0.00

0.0000

a

0.1 5 0 A 0 0.00

0.0000

0.00 Pg 0 -0.00

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
0.00	T_B	-0 0	
0.00 0.00	T_j	-0 2	
0.00 -0.00 j2)	V_{RM}	0	V
0.00 j2)	V_{RM}	0	V
0.00 -0.00 c 2)	I_{RM}	0	A
0.00 0.00 j2)	I_{RM}	0	A
0.00 0.00 j2)		0	
I^2t_{RM} (0.00 j2)	I^2t	0	A ² S

0.00 -0.00


(0.2 0.00 j2)

 T_{j2} ; 0 - 0 - 0	V_p	1	μ
---	-------	---	-------


ELECTRICAL CHARACTERISTICS

Symbol	Test Condition	Quadrant	Value		Unit
I_G	$V_D = 0$; $R_L = 0$; q	- -	μ .	2	μ
				0	
V_G		A	μ .	1	V
V_G	$V_D = 0$; T_{j2} ; $R_L = 0$; kq	A	M .	0	V
I_L	$I_G = 2$; I_G	- -	μ .	0	μ
				0	
I_H	$I_T = 0$; μ		μ .	0	μ
μ	$V_D = 0$; 0 ; rT_{j2}		M .	0	V/ ϵS
μ	0 ; μ ; $j \pm 0$		M	0	V/ ϵS
t_0	$I_G = 0$; $I_A = 0$; $I_R = 0$; T_{j2}	T.F		0	ϵS

ORDERING INFORMATION

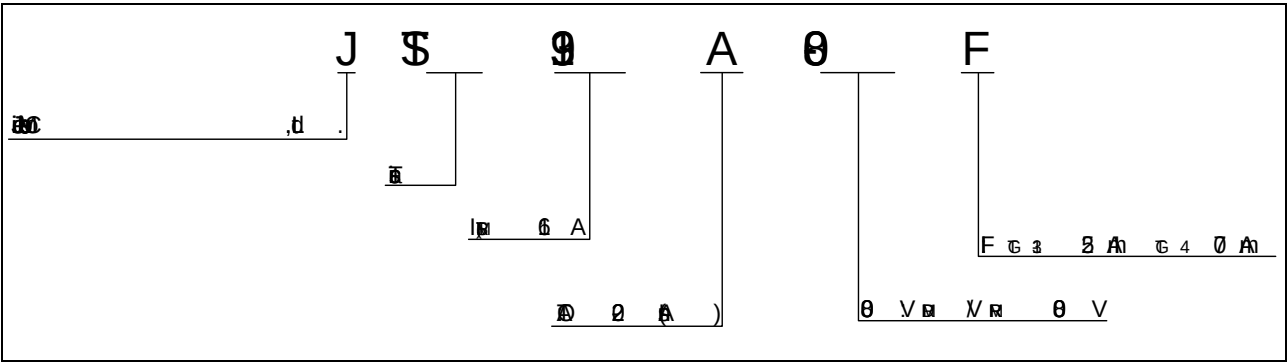

MARKING

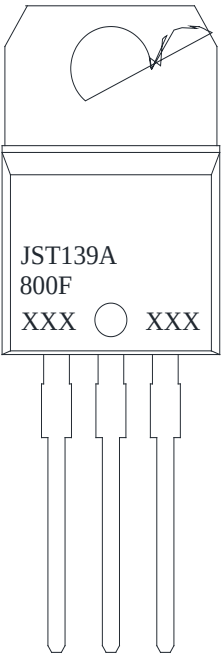

ORDERING INFORMATION

Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(mA)		Package	Base qty. (pcs)	Delivery mode
		- -				
JST139A-800F	800	25	70	TO-220A(Ins)	50	Tube

Document Revision History

Rev	Rev	Rev
A 1 ,0	A 10	甲
0	A 11	Re 甲

